


product illustration

When the earphone and mobile device is under connecting status, if did not connect successfully, 15 minutes later the system is default turning off automatically to save power.

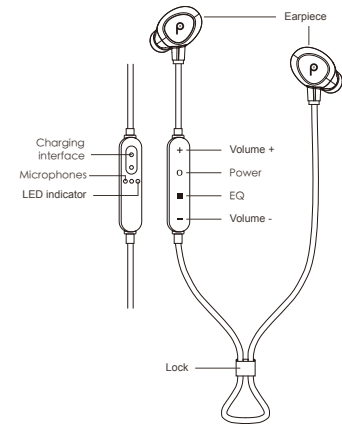

PAIRING

1. Pairing with 1 phone or tablet or PC or Notebook and so on:

- ① Turn on bluetooth on your phone.
- ② Turn on the headset and enter into pairing mode (Blue and Red light LED flash alternately).
- ③ Connecting

NOTICE: If your mobile phone bluetooth version is below version 2.1, please input password "0000" to enter. IMPORTANT: If the pairing can't be completed within 90 seconds while the pairing mode is activated, it means the pairing is unsuccessful, please repeat Step1 to Step3 to pair the headset with the bluetooth device again.


PAIRING

To pair the Bluetooth Headset with your device, you must first bring it into pairing mode.

1. Please turn off other Bluetooth devices nearby, and make sure the headset and your Bluetooth device are close together (within 3 feet).
2. Starting with the headset turned off. Press and hold the multifunction button of approximately 7 seconds until the LED indicator flashes red and blue alternately with a voice prompt "pairing" (you will hear the voice prompt "power on" first, just keep holding the multifunction button). Now the headset is in pairing mode.
3. Active the Bluetooth function on your device and search for the nearby Bluetooth connection:
 - For iPhone/iPad/iPod: Settings—Bluetooth—On
 - For Android: Setting—Wireless& Networks—Bluetooth—On—Scan for devices
 - For Windows Phone 8 devices: Settings—Bluetooth—On
4. "TR-BTX80" Should be listed in the search result. Select the name to connect. Once connected, only the blue LED will blink slowly, and you will hear a voice prompt "connected"

charging

Put the charger to the magnet point so that they can stick together and charge.

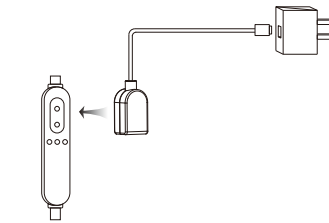

LED indicator display status

- battery low (Red led flash 2 time every 5 second)
- Charging (red light keep on)
- Full charged (blue light keep on)

Please use original POGO PIN USB charging cable or brand charging cable to charge. It will take 1-2 hours to charge fully. Don't use small current power bank to charge, it probably can't charge.

BUTTON FUNCTION

1. POWER ON/OFF




Turn the headset on
• Hold Button for 1 second
• Hear a voice "Power on"

Turn the headset off
• Hold Button for 2 seconds
• Hear a voice "Power off"



2. ANSWER
Short press any Button once to answer the call, when there is calling coming.


3. HANG UP THE CALLING
Short press power Button once to hang up the calling, when on the calling.




4. REJECTING AN INCOMING CALL
Double click any button to reject a call, when on the calling.

BUTTON FUNCTION

5. LAST NUMBER REDIAL



Double click power button to redial the last calling number. Note: Depend on your phone type, the actual operation may vary.




6. PAUSE/PLAY
Short press power button once, play music, when the play is on pause. Short press power button once to pause, when the music is on play.




7. VOLUME BUTTON
VOL - : Click the - button to decrease the voice, click 1 time, decrease 1 grade.
VOL + : Click the + button to increase the voice, click 1 time, increase 1 grade.

BUTTON FUNCTION

8. Answer/Reject/ Three sides on communications

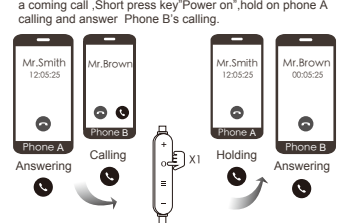


① When the phone A is on calling, and phone B there is a coming call. Short press key "Power on", hold on phone A calling and answer Phone B's calling.

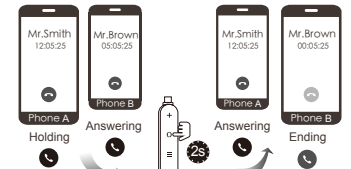


② Under the condition of ①, press key "Power On" to Switch Phone A and Phone B's calling, long press key "Power on" 2 seconds to hang up the calling.

BUTTON FUNCTION

③ Under the condition of ①, double click Key "Power on" to hang up the hold calling.

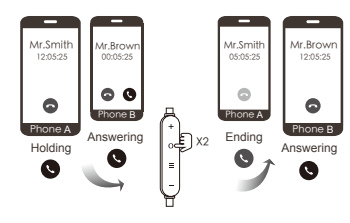


④ When Phone A is on calling, there is calling from phone B. Double-click the power button, hang up the phone B to keep the phone A call.

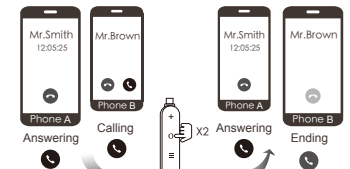


BUTTON FUNCTION

⑤ When Phone A is on calling, there is calling from phone B. Click the power button, hang up the phone A to connect the phone B call.

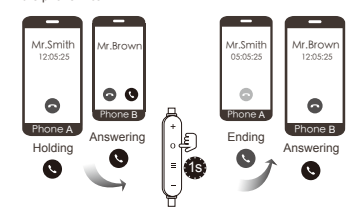

9. ADJUST EQ
Short press button "EQ", change EQ from All, slight bass and pitch in circle. (Under the condition of playing music.)

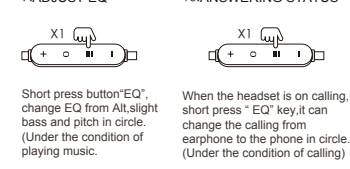

10. ANSWERING STATUS
When the headset is on calling, short press "EQ" key, it can change the calling from earphone to the phone in circle. (Under the condition of calling)

BUTTON FUNCTION

11. PREVIOUS SONG/NEXT



Previous Song
Long press "-" for 2 seconds during music play status

Next Song
Long press "+" for 2 seconds during music play status



12. DELETE PAIRED DEVICES FUNCTION

13. SWITCH CHINESE VOICE TO ENGLISH VOICE


Long Press Key "Power on" and Key "-" 5 seconds at the same time, it can delete the paired device history. After deleted, there is a voice remind you "disconnected" (It is to solve the problem that when the headset connected with several phone and can not connected with other phones).

Under pairing mode but not pairing successfully: Short Press "volume +" and "volume -" together to switch Chinese voice to English voice, when operating successfully will prompt "Chinese mode or English mode".

For support & service, please contact Feliztrip or local agent via the website at www.feliztrip.com

产品说明图

耳机和手机等设备连接状态下,系统默认15分钟后会自动关机以节约电量。

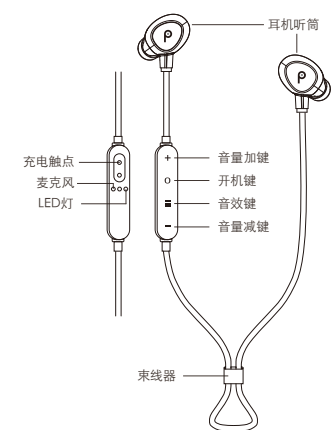

配对

1. 单机配对: 可与手机、平板电脑、台式电脑、笔记本等蓝牙的设备配对。


- ① 开启手机蓝牙。
- ② 长按1秒开机键进入配对模式 (红绿灯交替闪烁)。
- ③ 搜索TR-BTX80进行配对连接 (配对成功后有提示:已连接。)

多点连接: 支持一个蓝牙耳机连接两部手机

- 提示:
1. 已配对的机器,重新开机或在可搜索范围内,可自动连接。不能连接时,点按开机键或手机打开蓝牙界面,点击配对名称可以回连。
 2. 如果配对不能在90秒内完成,耳机将进入休眠状态,就表明配对失败,请再根据以上3个步骤重新配对。
 3. 配对不成功,请删除手机上的配对名,重复配对,直到配对成功。

充电方式

将充电器如图方向对准磁触点连接充电器进行充电。

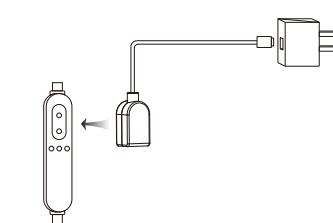

LED指示灯显示状态:

- 电量低 (每隔5秒红灯闪烁2次)
- 充电中 (红灯常亮)
- 电池充满 (绿灯常亮)

本机须使用原装POGO pin USB充电,充电线连5V(1A-2A)电源适配器,5V(1A-2A)车载充电头,推荐用2A以下电源适配器给耳机进行充电。蓝牙耳机充满电需约2小时左右,不能使用小于100毫安的电源适配器。车载充电头,这样会导致不能给耳机充电。

温馨提示

- 本机充电时请注意使用原装充电器或电脑端口充电,切不可使用廉价劣质的充电器。
- 产品还售前, 请自行保存好您的资料, 以免丢失。
- 如果产品发生故障, 我们将严格按照国家规定以及我们力所能及的服务为您解答问题, 但我们可能不会为因使用产品而导致的财产损失以及经济损失承担相关法律责任。
- 蓝牙耳机均有使用环境以及连接距离的问题, 请您勿在大电磁干扰和辐射的环境中使用。
- 请不要将蓝牙耳机置于水中或摔打, 这些均会造成产品损坏。
- 如果您的蓝牙耳机长时间不使用, 请约30天充电一次, 以防止因缺电而造成的无法启动。
- 我们可能在未事先通知您的情况下, 对于此产品进行一次软件或者硬件以及外观的升级和改动, 请您以实物为准。

按钮功能

1. 开/关机
开机: 长按开机键1秒
- 关机: 长按开机键2秒

按钮功能

2. 接听电话
单击任意键接听电话
3. 拒接来电
双击任意键拒接来电
4. 挂断电话
单击开机键挂断电话
5. 未位电话重拨
双击开机键未位号码重拨
6. 音乐暂停/播放
单击开机键: 播放/暂停
7. 音量- / 音量+
单击: 减音量 音量减小
单击: 加音量 音量增大

按钮功能

8. 接听/拒接/三方通话 (一个耳机连接一台手机)
 - ① 当与电话A通话, 电话B来电: 单击开机键, 保持电话A并接听电话B。
 - ② 在①这种状态下, 单击开机键可来回切换A/B通话, 长按开机键2s挂断通话电话。

按钮功能

- ③ 在①这种状态下, 双击开机键挂断保持电话。
- ④ 当与A手机通话, B手机来电, 双击开机键, 拒接B手机来电。

按钮功能

- ⑤ 当与电话A通话, 电话B来电, 按开机键1s, 挂断电话A通话, 接听电话B来电。
9. 音效切换模式
在播放音乐状态下, 单击音效键, 可切换现代(默认), 流行, 爵士, 古典四种音效。
10. 接听模式
在通话状态下, 单击音效键, 可实现从耳机转到手机来回互相切换接听。

按钮功能

11. 上一曲/下一曲
长按+键2秒上一曲
长按+键2秒下一曲
12. 清除配对功能
同时长按开机键和减音量5秒, 可清除掉之前所配对过本机蓝牙的手机, 清除成功后会提示 "蓝牙已断开" (此功能为了能解决多台手机连接, 导致自己蓝牙连接不上而设定, 在开机未连接状态下操作)
13. 中英文切换
开机未配对状态下: 加减键同时按一下可实现中英文语言切换, 操作成功会提示 "中文模式或 English mode"。



TR-BTX80
Stereo BT Earphones

USER MANUAL

Please read this user manual carefully before use.