


TR-Elite R2说明书 size:80*120mm


Getting Started

Check the box contents: you should have:

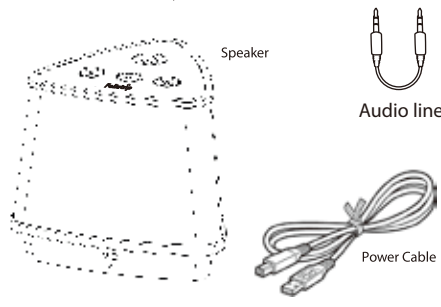

Speaker
Audio line
Power Cable

Getting to know your TR-Elite R2 Speaker

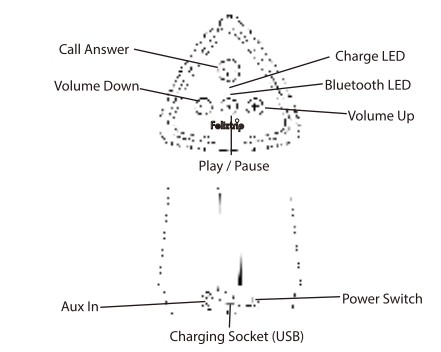

Call Answer
Volume Down
Play / Pause
Charging Socket (USB)
Charge LED
Bluetooth LED
Volume Up
Aux In
Power Switch

Charging your speaker

1. Insert the small USB end of the power cable into the charging socket on the speaker. Slot the large end of the power cable into a USB slot on your computer or your mobile phones power supply.
2. Leave the speaker to charge until the charge indicator light turns off. Now the speaker is fully charged and ready for use.

Using your speaker

1. Check the On/Off switch is set to ON
2. Check the Bluetooth Status LED is flashing – this indicates that there are no other devices connected to the speaker and it is ready to be paired. If another device is paired, the Bluetooth LED indicator is flashing slowly. Press and hold the Play/Pause button for more than 2 seconds to enter pairing mode
3. In your phone's Bluetooth settings, search for TR-Elite R2, and pair your phone with the speaker (please consult your phones user manual for specific instructions on how to pair with bluetooth devices)
4. Once pairing has been completed, the bluetooth status LED will flash at a slow rate (once every other second).
5. Select and play your music on your phone. Adjust the volume on your phone to suit your listening requirements.
6. To listen to music using the Aux In, connect a 3.5mm auxiliary cable to the Aux in socket. The input on the TR-Elite R2 will automatically change, and the Bluetooth LED will illuminate GREEN to show that it is in AUX mode.

Answering Calls

1. Should you receive a phone call whilst using the TR-Elite R2 with Bluetooth, you can answer it and talk hands free by pressing the Call Answer button on the top of the speaker
2. To end you call, and return to listening to music, press the Call Answer button on the top of the speaker again.

Note: The background noise may increase when the battery charge level is low. Some audio devices such as laptops may generate increased noise at higher volumes.

Product Specification

Power Output:	5W
Speaker:	51mm
Frequency Response:	100-20,000 Hz
SNR:	>89dB
Size:	105mm x 100mm x 85mm
Charging Time:	4 hours
Playing Time:	6.5 hours

Note: Charging time depends on the power output of the charger used. Playing time depends on the type of music and volume level used.

Warning


- This speaker contains a lithium battery. It must be used and charged correctly
- Improper use of this speaker may cause the battery to catch fire or explode resulting in serious or fatal injury
- The battery shall not be exposed to excessive heat such as sunshine, fire or suchlike

Caution

- Do not disassemble or modify the speaker
- Do not place the speaker in direct sunlight, near fires, stoves or other high temperature conditions
- Do not expose the speaker to water, salt water or allow the speaker to get wet
- If you dispose of the speaker, remember it contains a lithium battery and recycle accordingly

Correct disposal of this product

This marking indicates that this product should not be disposed of with other household wastes throughout the EU.



To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources.

To return your used devices, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmentally safe recycling.

For support & service, please contact Feliztrip or local agent via the website at www.feliztrip.com

盒内含附件:



音箱
音频线
电源线

了解您的TR-Elite R2音箱:



接听电话
音量减少
播放 / 暂停
音频线接口
USB 充电接口
充电指示灯
蓝牙信号灯
音量加大
开关

操作说明:

1. 蓝牙连接

A) 打开音箱电源开关, 蓝色 LED 快闪语音提示: POWER ON; 音箱进入快闪回连状态, 尝试连接上一次的蓝牙装置, 如果连接成功, 则有“connected”提示音; 如果不能成功回连, 10秒后声音提示: PAIRING, 蓝牙 LED 快闪进入 (自动回连, 回连不成功则配对) 可配对状态, 蓝牙装置可以和它连接。回连与配对中, LED 闪烁, 对配成功后, LED 常亮。

B) 在已配对中, 长按电话键进入蓝牙进入可配对状态 LED 快闪语音提示: 先播出 Disconnected 提示音, (无待 1 秒后, 再播出 PAIRING), (主动断开蓝牙默认进入蓝牙配对状态) 如配对完成则语音提示: connected。

C) 音箱 10 分钟无连接或者配对不成功语音提示: Connection failed 12 分钟自动关机

D) 蓝牙已连接播放音乐时, 手机断开蓝牙则语音提示: Disconnected

E) 当有电话呼入时语音提示: incoming call,

F) 双击电话键, 播号被联手机中, 最后一次通话的电话号码。在电话中, 短按一下, 挂机。来电拒接: 长按电话键

2. AUX操作:

a. 插入AUX, 状态指示为绿灯

3. 语音提示:

a) POWER ON: 连接电源 (开机提示)
b) PARING: 配对 (长按接听键提示蓝牙已断开)
c) connected: 配对完成 (配对成功提示)

d) Connection failed: 配对不成功 (配对状态10分钟配对不成功提示)
e) Disconnected: 蓝牙断开连接
f) incoming call: 电话呼入 (电话呼入时提示)
g) Battery Low 电量低
h) Max volume 最大提示音音量

4. 操作检查:

a) 长按暂停可以进入蓝牙配对状态, 检查蓝牙的设备名字为 “TR-Elite R2”
b) 蓝牙可以与手机配对, 配对成功后, 蓝色灯常亮。
c) 在BT或者AUX播放音乐时, 短按BT按钮暂停, 再次短按播放
d) 测试距离, 手机与蓝牙音箱的距离大于等于10m

5. POWER红色灯充电时常亮, 充满时红色灯熄灭, 绿色灯常亮。

4. 待机和自动关机:

如果10分钟蓝牙音箱未连接, 则进入待机状态语音提示: Connection failed。此时音箱可以回连。12分钟无连接自动关机

更多信息请访问: www.feliztrip.com



TR-Elite R2

Stereo Wireless Speaker

SUPERBASS

User manual

Please read this user manual carefully before use.